

“Dissemination of Education for Knowledge, Science and Culture”

- Shikshanmaharshi Dr. Bapuji Salunkhe

Shri Swami Vivekanand Shikshan Sanstha's

Vivekanand College, Kolhapur

(Empowered Autonomous)

Full Report on

Under an International MoU between Vivekanand College, Kolhapur, India and Henan University, Kaifeng, China

Research Paper Publication

by 03 M.Sc. Students of Department of Physics

in Peer Reviewed International Journal

“Surface Topography: Metrology and Properties” (Impact Factor: 2.7)

by

Department of Physics and IQAC

On

Day, Date: Tuesday, 17th October 2023

Submitted by

Dr. Sanjay S. Latthe

Head of the Department,

Department of Physics, Vivekanand College, Kolhapur (Empowered Autonomous)

Submitted to

Internal Quality Assurance Cell (IQAC)

Vivekanand College, Kolhapur (Empowered Autonomous)

(2023 – 24)

Table of Information

| Sr. No. | Content | Numbers |
|-----------|------------------------------|---------|
| 01 | Total Participants (Authors) | 11 |
| 02 | Female Authors | 04 |
| 03 | Male Authors | 07 |

Brochure



"Dissemination of Education for Knowledge, Science and Culture"
- Shikshanmaharshi Dr. Bapuji Salunkhe

Shri Swami Vivekanand Shikshan Sanstha's

Vivekanand College, Kolhapur

Empowered Autonomous

(Affiliated to Shivaji University, Kolhapur)

Department of Physics



Congratulations to 03 M.Sc. Students of Department of Physics

for

Research Paper Publication entitled

"Development of Self-cleaning Superhydrophobic Cotton Fabric through Silica/PDMS Composite Coating"

in Peer Reviewed International Journal



"Surface Topography: Metrology and Properties"

(Impact Factor: 2.7)



Miss. Alsaba J. Sayyad
M.Sc. Student (2022-23)
Vivekanand College,
Kolhapur, India



Miss. Wahida S. Jamadar
M.Sc. Student (2022-23)
Vivekanand College,
Kolhapur, India



Miss. Priyanka B. Khot
M.Sc. Student (2022-23)
Vivekanand College,
Kolhapur, India



Dr. Sanjay S. Latthe
Assistant Professor
Vivekanand College,
Kolhapur, India



Prof. Shanhu Liu
Professor
Henan University,
China



Dr. Rajaram S. Sutar
Post – Doctoral Fellow
Henan University,
China

Principal

HoD, Physics

Photographs of Felicitation



Felicitation by Prin. Abhaykumar Salunkhe Saheb, Chairman, Shri Swami Vivekanand Shikshan Sanstha, Kolhapur



Felicitation by Prin. Dr R R Kumbhar, Vivekanand College, Kolhapur



**Felicitation by Mr. Kaustubh Gawade Sir, CEO, Shri Swami Vivekanand Shikshan Sanstha,
Kolhapur**



**Felicitation by Prin. Shubhangi Gawade Madam, Secretary, Shri Swami Vivekanand Shikshan
Sanstha, Kolhapur**

Full PDF of Published Research Paper

Under an International MoU

between

Vivekanand College, Kolhapur, India

and

Henan University, Kaifeng, China

PAPER

Development of self-cleaning superhydrophobic cotton fabric through silica/PDMS composite coating

To cite this article: Rajaram S Sutar *et al* 2023 *Surf. Topogr.: Metrol. Prop.* **11** 045004

View the [article online](#) for updates and enhancements.

You may also like

- [Fluorine-free superhydrophobic cotton fabric for highly-efficient gravity-driven oil/water separation](#)
WX Voo, WC Chong, HC Teoh *et al.*
- [High energy density flexible Zn-ion hybrid supercapacitors with conductive cotton fabric constructed by rGO/CNT/PPy nanocomposite](#)
Changwang Li, Huilian Hao, Jiayu Liang *et al.*
- [Recent progresses in super-hydrophobicity and micro-texturing for engineering applications](#)
Vijay Kumar, Rajeev Verma, Vishal S Sharma *et al.*

Surface Topography: Metrology and Properties



PAPER


Development of self-cleaning superhydrophobic cotton fabric through silica/PDMS composite coating

RECEIVED
31 March 2023

REVISED
25 September 2023

ACCEPTED FOR PUBLICATION
17 October 2023

PUBLISHED
9 November 2023

Rajaram S Sutar^{1,2}, Bairu Shi^{1,3}, Susmita S Kanchankoti², Sagar S Ingole², Wahida S Jamadar⁴, Alsaba J Sayyad⁴, Priyanka B Khot⁴, Kishor Kumar Sadasivuni⁵, Sanjay S Latthe⁴, Shanhu Liu^{1,*}  and Appasaheb K Bhosale^{2,*}

¹ College of Chemistry and Molecular Science, Henan University, Kaifeng 475004, People's Republic of China

² Self-cleaning Research Laboratory, Department of Physics, Raje Ramrao College, Jath, 416404, (Affiliated to Shivaji University, Kolhapur) Maharashtra, India

³ Petro China Research Institute of Petroleum Exploration & Development, Beijing 100083, People's Republic of China

⁴ Self-cleaning Research Laboratory, Department of Physics, Vivekanand College (Autonomous), Kolhapur—416003, (Affiliated to Shivaji University, Kolhapur) Maharashtra, India

⁵ Center for Advanced Materials, Qatar University, P. O. Box 2713, Doha, Qatar

* Authors to whom any correspondence should be addressed.

E-mail: liushanhu@163.com and akbhosale1@gmail.com

Keywords: superhydrophobic coating, hydrophobic silica nanoparticles, superhydrophobic cotton fabric, self-cleaning coating

Supplementary material for this article is available [online](#)

Abstract

The lotus effect informs that self-cleaning superhydrophobic surfaces can be obtained by creating rough surface structures and modifying them with chemicals that have low surface energy. Herein, the composite of hydrophobic silica nanoparticles (SNPs) and polydimethylsiloxane (PDMS) was deposited on cotton fabric by multiple dip cycles. At optimal condition, the agglomerated SNPs in PDMS produces a hierarchical rough surface, as a result the coated cotton fabric has revealed a water contact angle (WCA) of $158.41 \pm 1.58^\circ$ and 4° of sliding angle. Due to negligible water adhesion to a superhydrophobic surface, coated cotton fabric reveals excellent self-cleaning behavior, which was tested by dust particles, muddy water and tea droplets. Furthermore, coated cotton fabric sustains superhydrophobicity over the mechanical robustness tests including adhesive tape peeling test, sandpaper abrasion test, and ultrasonication. Therefore, such an approach may be applicable in textile industries for self-cleaning purposes.

1. Introduction

A lotus leaf is very well known as an example of purity, the dust particles are easily removed by rolling water droplets from the leaf surface. The presence of micro-scale papillae and nano-scale wax materials, the lotus leaf surface exhibits self-cleaning superhydrophobic characteristic [1]. Superhydrophobic surfaces have exhibits higher WCA as well as lower sliding angle, due to this reason water droplets are freely movable on their surface. The dust particles have stronger adhesion towards water droplets than superhydrophobic surface. Hence, the rolling water droplets can easily collect dust particles on the way and clean surface itself, this performance is recognized as self-cleaning or lotus effect [2]. Till a date, the superhydrophobic surfaces have been used for self-cleaning [3], oil–water

separation [4], anti-freeze [5], and anti-corrosion [6] applications. Many efforts have been made to fabricate superhydrophobic coatings using various fabrication techniques such as phase separation [7], spray coating [8], drop-casting [9], dip coating [10, 11] and so on [12, 13].

Cotton fabrics have softness, breathability, moisture absorption, and flexibility characteristics [14]. Cotton fabric is one of the essential materials, utilized extensively in households and industries for a variety of reasons in our daily lives. Apparels that is made of cotton fabrics are contaminated by various types of contaminants in indoor and outdoor movement. The contaminated apparels required regular washing. The frequent mechanical washing by detergents degrades the shine and lifetime of the cotton fabrics. Therefore, cotton fabrics must have the ability to clean themselves

in order to withstand dust particles and other surface contaminants [15]. The self-cleaning superhydrophobic coating on cotton fabric can resolve these issues [16]. The cotton fabric has inherent roughness; hence the superhydrophobicity on cotton can be easily achieved by applying a layer of low surface energy materials [17]. Recently, Latthe *et al* [18] have deposited a suspension of hydrophobic silica nanoparticles on cotton fabric shirts and fabric shoes via spray and dip coating methods, respectively and obtained superhydrophobic surface. They also deposited hydrophobic silica nanoparticles suspension on body of a motorcycle, a little boat, a solar cell cover glass, building wall, window glass, currency notes, metal, wood, sponges, plastic, and marble substrates. Such superhydrophobic coated substrates had showed outstanding self-cleaning properties. Eduok *et al* [19] have prepared superhydrophobic cotton fabric by depositing a nanocomposite of zirconia/ polydimethylsiloxane through dip coating technique. The prepared superhydrophobic cotton fabric was showed WCA of $155.5 \pm 0.5^\circ$ and contact angle hysteresis of $2.5 \pm 0.3^\circ$. The coated cotton fabric showed self-cleaning properties against chalk particles, which were taken as dust particles. Phuong *et al* [20] have prepared superhydrophobic cotton fabric using silica nanoparticles and tetraethylorthosilicate (TEOS) by dip coating method. The silica nanoparticles agglomerated on the fibers endows the rough structure. As a result, the coated cotton fabric had showed WCA of 173° . Xiong *et al* [21] have fabricated fluorine-free multifunctional superhydrophobic cotton fabric by using dip-coating method. Micro-sized SiO_2 and nano-sized TiO_2 particles were bound together by silane coupling agent. A hierarchical structure was formed due to SiO_2 and TiO_2 particles strongly bonded to the cotton fabric with silane. Such superhydrophobic cotton fabric exhibited a WCA of 161.7° . Pal *et al* [22] have fabricated superhydrophobic cotton fabric by simple dip coating method using TiO_2 and 3-(trimethoxysilyl) propyl methacrylate. The fabricated superhydrophobic cotton fabric exhibited excellent self-cleaning behavior for rhodamine-B dye as a pollutant. The superhydrophobic cotton fabric was showed mechanical stability for 50 adhesive tape peeling cycles with the WCA reduced from 154.3° to 146.8° . In 20 cycles of washing durability test, the WCA decreased from 154° to 143.2° . Many researchers have used numerous chemicals, and complicated fabrication processes to develop self-cleaning superhydrophobic cotton fabric [23–27]. Weakly adhered hydrophobic material on cotton surface has revealed poor mechanical robustness. Consequently, production cost may increase and limited to their industrial scale applications. To avoid these drawbacks, a facile and cost-effective approach is essential for production of robust superhydrophobic coating on cotton fabric for large scale application.

In this study, a simple dip-coating approach was adopted to produce self-cleaning superhydrophobic coating on cotton fabric by depositing consecutive dipping layers of PDMS and hydrophobic SNPs. The PDMS act as an adhesive layer between the substrate and SNPs and inter-binding of nanoparticles so that the durability of the coating can be enhanced on the cotton fabric. The coated cotton fabric exhibits good mechanical robustness against adhesive tape testing, sandpaper abrasion testing, heat treatment, and ultrasonication test. Also, the coated samples showed excellent self-cleaning ability.

2. Experimental

2.1. Materials


Polydimethylsiloxane (PDMS; viscosity 5 cSt) was purchased from Sigma-Aldrich, St. Louis, MO, USA. Hydrophobic silica nanoparticles (SNPs; $\geq 99.8\%$ SiO_2 ; particle size 50 nm; AEROSIL R 9200) was purchased from Nippon AEROSIL Co. Ltd, Japan. Chloroform (CHCl_3 ; 99%; AR grade) purchased from spectrochem private limited, Mumbai, India. Pure cotton fabrics were procured from DKTE Society, Textile industry, Ichalkaranji, Maharashtra, India.

2.2. Preparation of the superhydrophobic coating on the cotton fabric

Initially, the cotton fabric was cut into small pieces of size $8 \times 3 \text{ cm}^2$. The cotton fabric pieces were cleaned in distilled water and ethanol to remove surface contaminants using ultrasonication bath and it dried in oven at 80°C for 30 min. A 0.5 ml of PDMS was dissolved in 20 ml of chloroform by using magnetic stirrer for 30 min. Simultaneously, 100 mg of hydrophobic SNPs were dispersed in 20 ml of chloroform by continuous stirring for 30 min. The pre-cleaned cotton fabric was dipped in the PDMS solution for 10 s and dried at room temperature for 5 s. Thereafter, the cotton fabric was dipped in the SNPs dispersion for 10 s and kept at room temperature for drying. In this, the dip and withdrawing speed (100 mm min^{-1}) was controlled by dip coating machine. The first layer deposition of PDMS and SNPs is referred as one dipping cycle of coating composite. Likewise, 5 dipping cycles were applied on cotton fabric and dried at 100°C for 30 min in hot air oven. Furthermore, for achieving optimal coating 10 and 15 dipping cycles were applied on fresh cotton fabric. The cotton fabric coated by 5, 10 and 15 dipping cycles are labeled as SC-1, SC-2, and SC-3 respectively. Figure 1 depicts the schematic of preparation of the superhydrophobic cotton fabric.

2.3. Characterizations

Surface morphology was studied by scanning electron microscopy (SEM, JEOL, JSM-7610F, Tokyo, Japan). Elemental analysis was performed using an energy

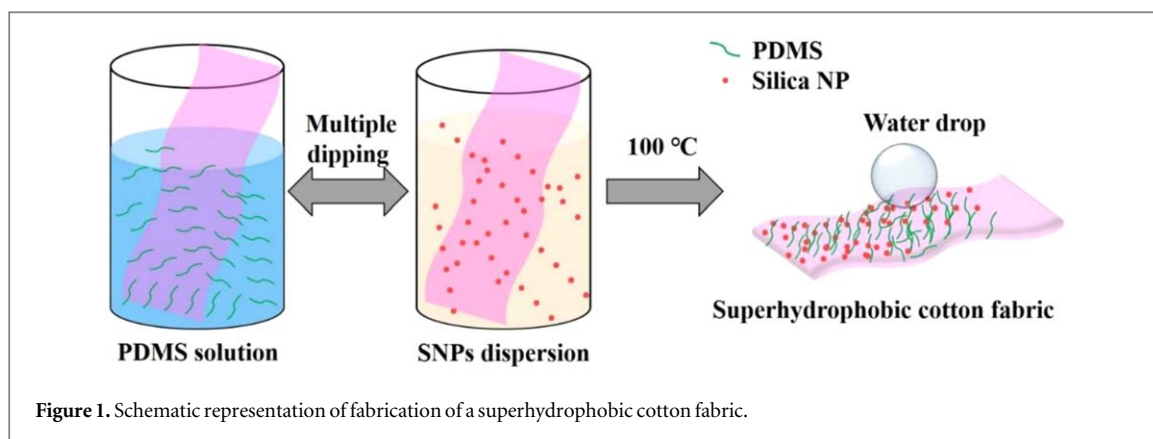

dispersive spectroscopy (EDS, Oxford Instruments X-Max, England) instrument. The chemical bonding was represented using Fourier transform infrared spectroscopy (FTIR, Magna-IR 560, Nicolet). The water contact angle and sliding angle of coatings were measured using a contact angle meter (HO-IAD-CAM-01, Holmarc Opto-Mechatronics Pvt. Ltd, Kochi, India). Mechanical durability of coatings was evaluated by adhesive tape test, sandpaper abrasion test, heating, and ultrasonication. Scotch magic tape having 4 N m^{-1} of adhesion strength was purchased from 3M India limited to carry out the adhesive tape test. Sandpaper (Grit No. C-120) was purchased from John Okey & Mohan Ltd, India for the sandpaper abrasion test. Thermal stability of coatings was determined by keeping the coated cotton fabric in oven at 200°C for 2 h. For ultrasonication test, the cotton fabric was kept in an ultrasonic bath for 20 min. A self-cleaning ability of coated cotton fabrics were checked by spreading dust particles as well as pouring muddy water and tea on it.

3. Results and discussion

3.1. Surface morphology, chemical composition and wettability

The surface and chemical structure analysis are an essential characterization for evaluating the superhydrophobic characteristic of prepared coatings. During the consecutive deposition of PDMS and SNPs layers on cotton fabric, SNPs embedded in polymer layer. After multiple deposition, SNPs get aggregated on cotton fabric surface. As shown in figures 2(a)–(f) illustrates that the SEM images of coated cotton fabrics. Figures 2 (a) and (d) depicts lower and higher magnified SEM micrographs for the 5 deposition cycles (SC-1 sample), coating composite covers cotton fabric surface and it makes hydrophilic cotton fabric becomes hydrophobic (WCA of $137.3 \pm 1.37^\circ$). The 10 consecutive layered deposition of PDMS and SNPs (SC-2), the agglomeration of SNPs occurs and produces microscale cavities, consequently surface structure is more roughened than SC-1 sample as shown in figure 2(b) and (e). The value of WCA gradually

increased. For SC-3 sample (15 deposition layer), the agglomerated SNPs and regular sized large number of cavities produces rough hierarchical surface structure as shown in figures 2(c) and (f). The cross-linking between the PDMS and hydrophobic SNPs formed hierarchical rough surface structure, is essential for achieving superhydrophobicity [28]. The dual scale hierarchical rough surface structure enable to trap air layer in their protrusion, which minimizes the actual contact of water drop to surface [29]. Therefore, the SC-3 sample reveals higher WCA of $158.41 \pm 1.58^\circ$ and SA of 4° . After 15 deposition cycles WCA becomes almost steady at around $158.5 \pm 1.58^\circ$ with number of deposition cycles. While depositing 20 and 25 layers of PDMS and SNPs on cotton fabric, the surface revealed WCA of $158.3 \pm 1.58^\circ$ and $159.32 \pm 1.59^\circ$. However, due to deposition of layers above 15, the surface depicted powdery appearance of coating material which was not found stable and ripped out by gentle fingertip touching. Hence, 15 deposition cycles of PDMS and SNPs is an optimum for achieving superhydrophobicity on cotton fabric. The optical image of colored water droplets on SC-3 sample is shown in figure 2(h) and their contact angle image shown in inset of figure 2(h). The EDS spectra of coating composite reveals three major peaks that are related to carbon (C), oxygen (O), and silicon (Si) elements. The larger proportion of C is related to the polymeric structure of PDMS and the elements Si and O present in composite coating owing to PDMS and SNPs. This proportion of C, O and Si confirms that the coating composite of PDMS and SNPs present on cotton fabric surface. The mass percentage of Si, C and O elements are given in table 1.

The chemical bonding of the coatings (SC-1 to SC-3) is illustrated in figure 2(g) using the FT-IR spectroscopy. Due to the presence of PDMS and hydrophobic SNPs the strong peaks are seen in the region of $1100\text{--}470 \text{ cm}^{-1}$. The peaks at 800 cm^{-1} and 476 cm^{-1} are represented the asymmetric and symmetric deformation of the PDMS. The peaks at 1260 cm^{-1} and in the range $800\text{--}470 \text{ cm}^{-1}$ are represents Si-CH₃ group [30, 31]. The peak at 1092 cm^{-1} is assigned to asymmetric stretching vibration of

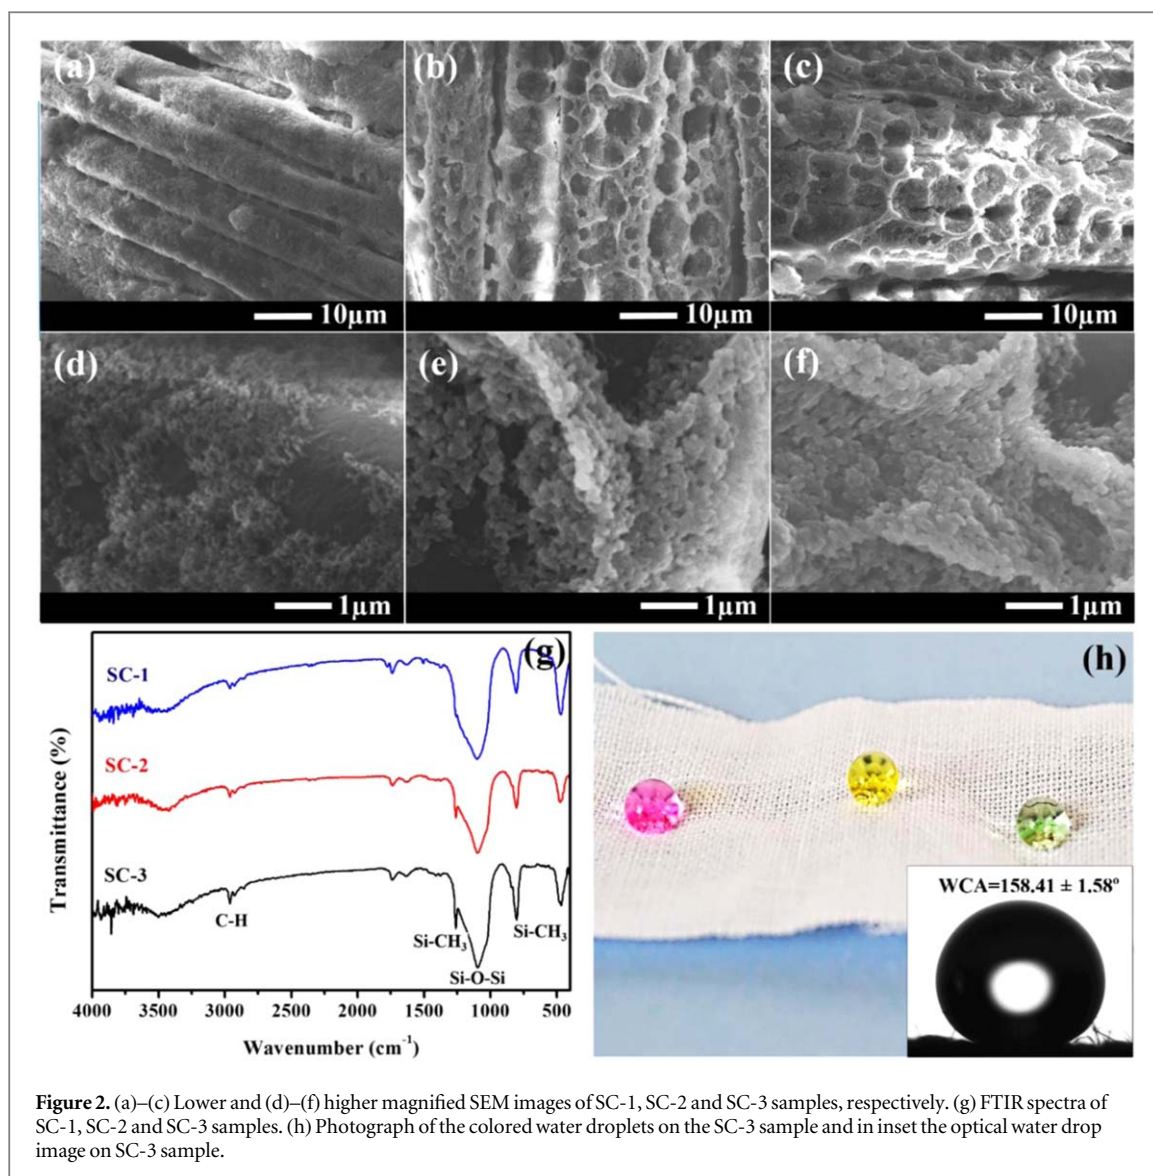


Figure 2. (a)–(c) Lower and (d)–(f) higher magnified SEM images of SC-1, SC-2 and SC-3 samples, respectively. (g) FTIR spectra of SC-1, SC-2 and SC-3 samples. (h) Photograph of the colored water droplets on the SC-3 sample and in inset the optical water drop image on SC-3 sample.

Table 1. The mass percentage of elements present in coatings.

| Sample | Si-K (Mass %) | C-K (Mass %) | O-K (Mass %) |
|--------|---------------|--------------|--------------|
| SC-1 | 7.46 ± 0.93 | 44.79 ± 1.63 | 47.74 ± 2.91 |
| SC-2 | 6.81 ± 0.92 | 47.68 ± 1.70 | 45.51 ± 3.02 |
| SC-3 | 5.78 ± 0.90 | 49.54 ± 1.74 | 44.68 ± 3.10 |


Si–O–Si bond [32]. The peaks presence at 2963 cm⁻¹ and 2904 cm⁻¹ due to C-H asymmetric and symmetric vibrations, respectively [32]. Hence, the FTIR analysis concluded that the PDMS and hydrophobic SNPs exist in the coating.

3.2. Mechanical durability

Adhesive tape test was performed to evaluate adhesiveness of the coating materials on the cotton fabric [33]. The SC-3 sample revealed excellent superhydrophobic properties, therefore the mechanical durability was checked for this sample. Adhesive tape was adhered to the SC-3 sample and gently pressed by a fingertip to make adequate contact between coated fabric and

adhesive tape [34, 35]. The tape was peeled off to complete the adhesive tape test. In a similar manner, the adhesive tape test was performed 30 times. After completion of every 5 cycles of adhesive tape test the WCAs were recorded. As shown in figure 3(a), the WCA gradually decreases with number of adhesive tape test. The SC-3 sample retain their superhydrophobic property up to 15 cycles of adhesive tape test with exhibiting WCA of 150.46 ± 1.5° and 7° of SA. Hence it ensures that the coating material strongly adhered to cotton fabric and surface structure slightly disrupted as shown in figure S1(a). The presence PDMS as a binder in coating composite has created strong bonding towards the cotton fabric surface [36]. The WCA reduced to 138 ± 1.38° after completion of 30 tape peeling cycles, indicates that coating material moderately detached from cotton fabric. The screen snaps of adhesive tape test are shown in inset of figure 3(a).

Due to fragile, brittle surface structure and poor mechanical resistance, the superhydrophobic surfaces are disregard from practical applications. A sandpaper

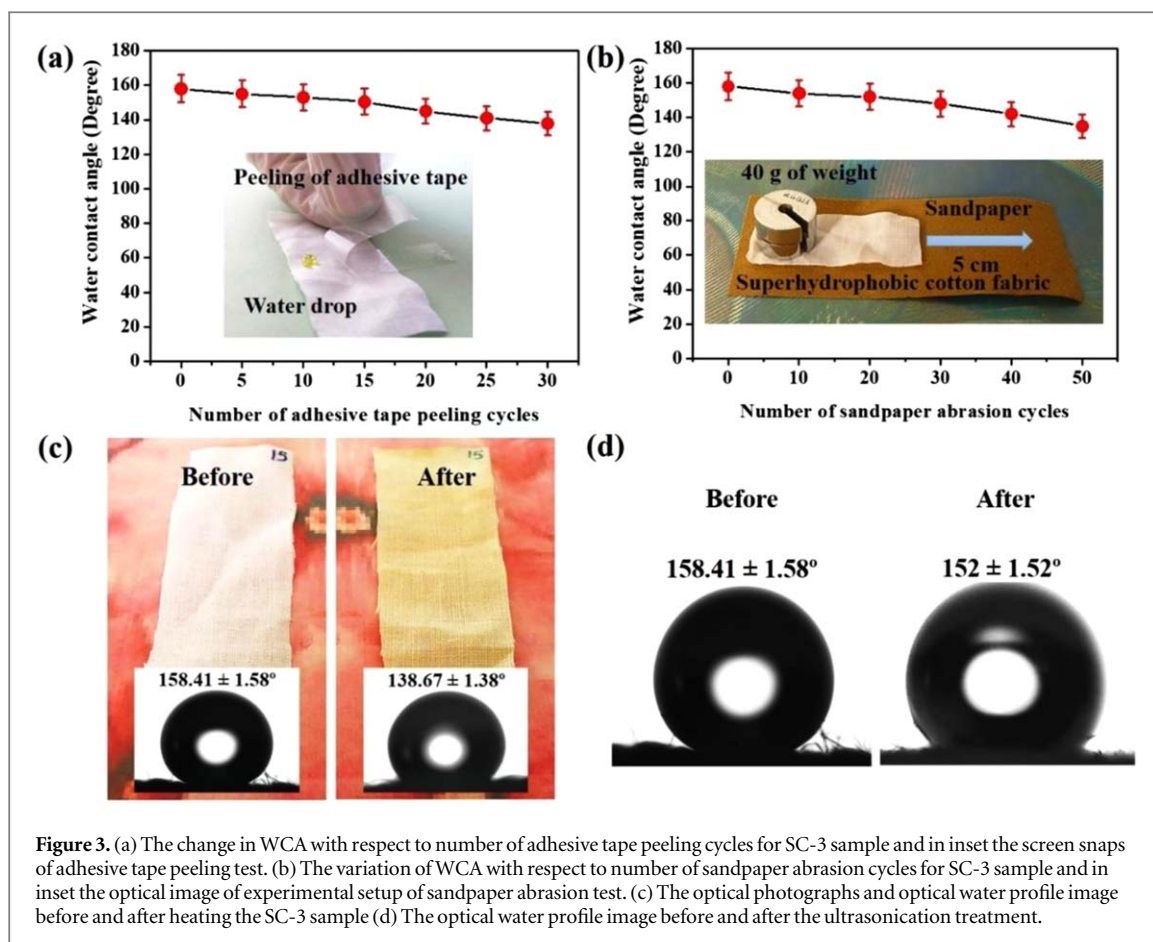

abrasion test is a common method to determine the wear resistance of the coatings [33]. The SC-3 sample was put on the sandpaper and a weight of 40 g imposed on it. The sample was dragged for 5 cm over the sandpaper with 5 mm.s^{-1} of speed; it is referred as one-cycle of sandpaper abrasion test. This process was repeated for 50 times. As shown in figure 3(b), the WCA continuously drops as sandpaper abrasion tests increased. The SC-3 sample sustained its superhydrophobicity up to 30 cycles of sandpaper abrasion test with WCA of $153.5 \pm 1.53^\circ$ and 6° of SA. Figure S1(b) shows that the microscale cavities were wrecked and formed new rougher structure with presence of microsized aggregated SNPs on SC-3 sample, hence it proved that the coating became tougher and resistant to mechanical damage [37]. Further, increasing sandpaper abrasion test to 50 cycles, the WCA decreased to $134 \pm 1.34^\circ$. This is due to detaching the weakly bounded SNPs from the PDMS film, which impacts overall surface roughness. The experimental arrangement of sandpaper abrasion test is shown in inset of figure 3(b).

The SC-3 sample kept in oven at 200°C for 2 h to evaluate thermal stability of coating. As shown in figure 3(c), the WCA of SC-3 sample significantly reduced to $138.67 \pm 1.38^\circ$. This can be due to the fact that surface structure might have restructured by increasing temperature and subsequent decomposition of hydrophobic materials [38]. In another method

of evaluating mechanical stability of coatings, the SC-3 sample was kept in water filled ultrasonication bath for 20 min. Ultrasonication is regarded as a more abrasive process than laundering [39]. Immediately the WCA was measured after treatment, found that WCA reduced to $152 \pm 1.52^\circ$ and SA decreases with small value (figure 3(d)). Ultrasonication test confirms that the prepared coating on cotton fabric is highly durable and sustain their superhydrophobicity up to 20 min of ultrasonic treatment [40]. The effective results of this work against other literatures are comparatively summarized in table 2.

3.3. Self-cleaning ability

Every solid surfaces in an exterior application are contaminated by different types of dust particles. Frequent cleaning requires the use of detergent, hazardous chemicals, time, and labor. Multiple mechanical cleanings reduce the initial shine of the surface. As prepared samples have extreme non-wetting property due to high WCA $158.41 \pm 1.58^\circ$ and SA of 4° that allows them to clean themselves. The self-cleaning ability of superhydrophobic cotton fabric was observed by spreading dust particles as well as pouring muddy water and tea. As shown in figures 4(a)–(b), the SC-3 sample was kept in petri dish and the fine soil dust randomly spread on sample surface. When water poured on the dust contaminated sample, water droplets become ball like shape and roll down in

Table 2. Comparative study of mechanical robustness between current work and existing literatures.

| Materials | Coating Method | Adhesive tape peeling test | Sandpaper abrasion test | Thermal stability test | Ultra-sonication treatment | References |
|--|----------------|----------------------------|-------------------------|------------------------|----------------------------|--------------|
| zirconia nanoparticles and polydimethylsiloxane | Dip | — | — | — | — | [16] |
| Zirconium (IV) n-propoxide (ZP) and 1 H, 1 H, 2 H, 2 H-perfluorodecyltriethoxysilane | Dip | — | 20 | — | — | [41] |
| Zirconium (IV) n-propoxide (ZP), hexadecyltrimethoxysilane, silver nitrate, cetyltrimethylammoniumbromide | Dip | 30 | 30 | — | — | [34] |
| Triethoxyvinylsilane, polydimethylsiloxane, silver nitrate, cetyltrimethylammoniumbromide | Dip | 20 | 10 | — | — | [42] |
| Tetraethylorthosilicate, Dopamine hydrochloride, Tris(hydroxy methyl)aminomethane, Dodecyltrimethoxysilane | Dip | — | — | — | 40 min | [43] |
| Hydrophobic silica nanopartilces and polydimethylsiloxane | Dip | 15 cycles | 30 cycles | 200 °C | 20 min | Present work |

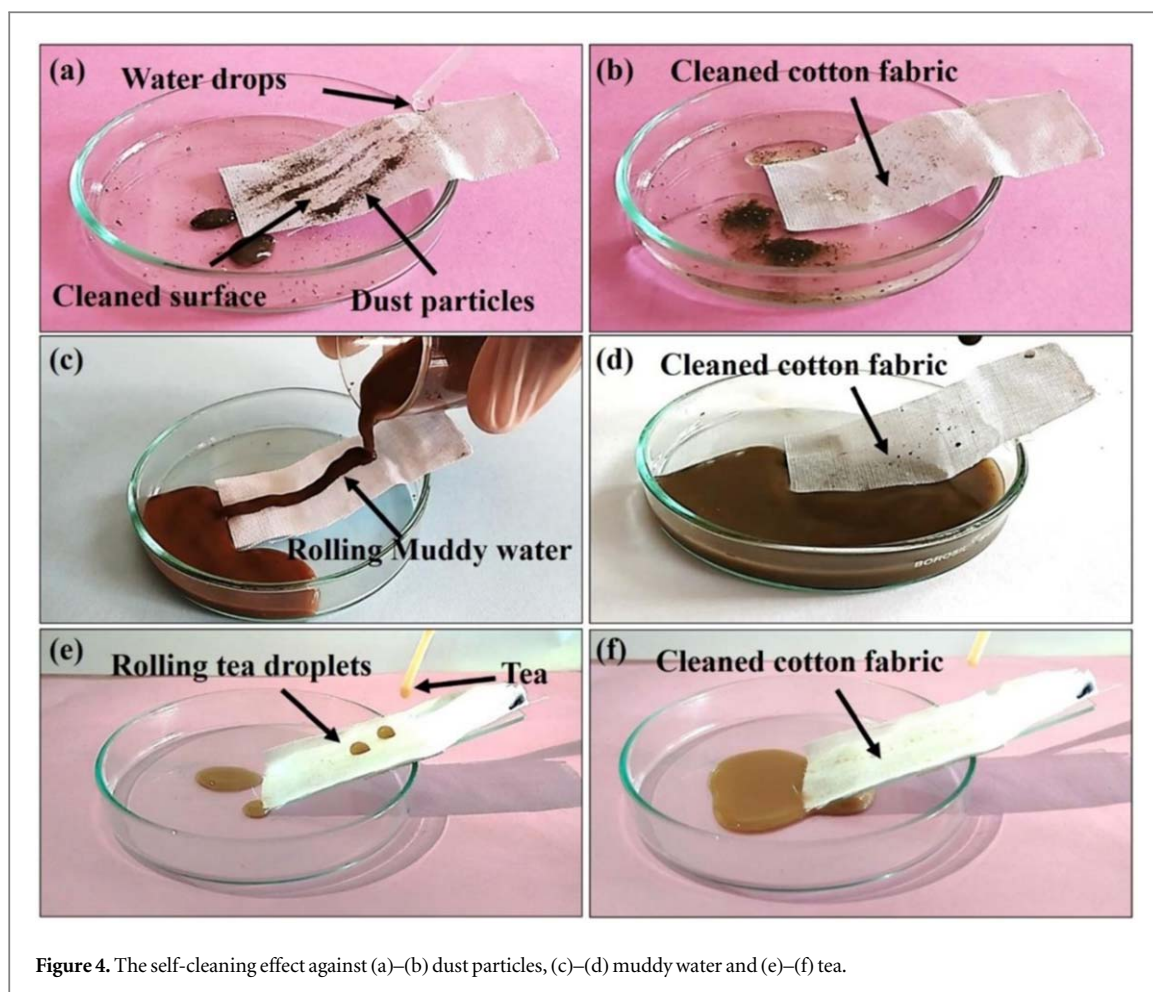


Figure 4. The self-cleaning effect against (a)–(b) dust particles, (c)–(d) muddy water and (e)–(f) tea.

downward direction. The rolling water droplets gather dust from the path and gently cleaned the surface. During the rainy season, many objects endured mud problems. Therefore, muddy water prepared by adding of 10 g of fine soil particles in 20 ml of water and poured on SC-3 sample (figures 4(c)–(d)). The muddy water drops roll down from superhydrophobic cotton fabric similar ordinary water droplets. Furthermore, tea was dumped onto a superhydrophobic cotton fabric (SC-3 sample), and tea droplets rolled down without adhering to the surface (figures 4(e)–(f)).

4. Conclusions

In summary, a simple low-cost dip-coating approach was employed to prepare superhydrophobic cotton fabric using polydimethylsiloxane and hydrophobic silica nanoparticles. During the preparation, SNPs aggregated in low surface energy PDMS forms regular shaped micro cavities, produces high scale roughness. As a result, coated cotton fabric (SC-3 sample) exhibited WCA of $158.41 \pm 1.58^\circ$ and SA of 4° . The chemical composition analysis indicates that the SNPs-PDMS coating composite covers the cotton fabric. The SC-3 sample was revealed good mechanical stability against 15 cycles of adhesive tape test, 30 cycles of sandpaper abrasion test and 20 min of

ultrasonication treatment. The prepared SC-3 sample demonstrated excellent self-cleaning ability in a variety of situations. Therefore, such an approach may be relevant for self-cleaning applications in the textile industries.

Acknowledgments

This work is financially supported by DST—INSPIRE Faculty Scheme, Department of Science and Technology (DST), Govt. of India. [DST/INSPIRE/04/2015/000281].

Data availability statement

All data that support the findings of this study are included within the article (and any supplementary files).

Declaration of interests

The author(s) declare no conflicts of interest with respect to the research, authorship, and publication of this article.

ORCID iDs

Shanhu Liu  <https://orcid.org/0000-0003-1382-7157>

References

- [1] Solga A, Cerman Z, Striffler B F, Spaeth M and Barthlott W 2007 The dream of staying clean: Lotus and biomimetic surfaces *Bioinsp. Biomim.* **2** S126–34
- [2] Chen J, Yuan L, Shi C, Wu C, Long Z, Qiao H, Wang K and Fan Q H 2021 Nature-inspired hierarchical protrusion structure construction for washable and wear-resistant superhydrophobic textiles with self-cleaning ability *ACS Appl. Mater. Interfaces* **13** 18142–51
- [3] Latthe S S, Terashima C, Nakata K, Sakai M and Fujishima A 2014 Development of sol–gel processed semi-transparent and self-cleaning superhydrophobic coatings *J. Mater. Chem. A* **2** 5548–53
- [4] Sutar R S et al 2020 Oil–Water Separation by ZnO-Based Superhydrophobic PU Sponges *Macromolecular Symposia* **393** 1–5 2000036 Wiley Online Library
- [5] Latthe S S, Sutar R S, Bhosale A K, Nagappan S, Ha C S, Sadasivuni K K, Liu S and Xing R 2019 Recent developments in air-trapped superhydrophobic and liquid-infused slippery surfaces for anti-icing application *Prog. Org. Coat.* **137** 105373
- [6] Latthe S S, Sudhagar P, Devadoss A, Kumar A M, Liu S, Terashima C, Nakata K and Fujishima A 2015 A mechanically bendable superhydrophobic steel surface with self-cleaning and corrosion-resistant properties *J. Mater. Chem. A* **3** 14263–71
- [7] Zhang Y, Wang H, Yan B, Zhang Y, Yin P, Shen G and Yu R 2008 A rapid and efficient strategy for creating superhydrophobic coatings on various material substrates *J. Mater. Chem.* **18** 4442–9
- [8] Manoudis P N, Karapanagiotis I, Tsakalof A, Zuburtikudis I and Panayiotou C 2008 Superhydrophobic composite films produced on various substrates *Langmuir* **24** 11225–32
- [9] Zhang Y, Zhou S, Lv Z, Fan L, Huang Y and Liu X 2022 A facile method to prepare superhydrophobic coatings for various substrates *Applied Sciences* **12** 1240
- [10] Chauhan P, Kumar A and Bhushan B 2019 Self-cleaning, stain-resistant and anti-bacterial superhydrophobic cotton fabric prepared by simple immersion technique *J. Colloid Interface Sci.* **535** 66–74
- [11] Pakdel E, Zhao H, Wang J, Tang B, Varley R J and Wang X 2021 Superhydrophobic and photocatalytic self-cleaning cotton fabric using flower-like N-doped TiO₂/PDMS coating *Cellulose* **28** 8807–20
- [12] Huang S, Liu G, Zhang K, Hu H, Wang J, Miao L and Tabrizzadeh T 2019 Water-based polyurethane formulations for robust superhydrophobic fabrics *Chem. Eng. J.* **360** 445–51
- [13] Kundu D, Banerjee D, Ghosh S, Das N S, Thakur S, Das B and Chattopadhyay K K 2019 Plasma enhanced chemical vapour deposited amorphous carbon coating for hydrophobicity enhancement in commercial cotton fabrics *Physica E* **114** 113594
- [14] Wang Y, Peng S, Shi X, Lan Y, Zeng G, Zhang K and Li X 2020 A fluorine-free method for fabricating multifunctional durable superhydrophobic fabrics *Appl. Surf. Sci.* **505** 144621
- [15] Cao C, Ge M, Huang J, Li S, Deng S, Zhang S, Chen Z, Zhang K, Al-Deyab S S and Lai Y 2016 Robust fluorine-free superhydrophobic PDMS–ormosil@ fabrics for highly effective self-cleaning and efficient oil–water separation *J. Mater. Chem. A* **4** 12179–87
- [16] Celik N, Torun I, Ruzi M and Onses M S 2021 Robust superhydrophobic fabrics by infusing structured polydimethylsiloxane films *J. Appl. Polym. Sci.* **138** 51358
- [17] Liu X, Gu Y, Mi T, Wang X and Zhang X 2021 Dip-coating approach to fabricate durable PDMS/STA/SiO₂ superhydrophobic polyester fabrics *Coatings* **11** 326
- [18] Latthe S S, Sutar R S, Kodag V S, Bhosale A K, Kumar A M, Sadasivuni K K, Xing R and Liu S 2019 Self-cleaning superhydrophobic coatings: Potential industrial applications *Prog. Org. Coat.* **128** 52–8
- [19] Eduok U 2021 New superhydrophobic and self-cleaning zirconia/polydimethylsiloxane nanocomposite coated cotton fabrics *New J. Chem.* **45** 638–50
- [20] Nguyen-Tri P, Altiparmak F, Nguyen N and Tuduri L 2019 Robust superhydrophobic cotton fibers prepared by simple dip-coating approach using chemical and plasma-etching pretreatments *ACS Omega* **4** 7829–37
- [21] Xiong Z, Huang J, Wu Y and Gong X 2022 Robust multifunctional fluorine-free superhydrophobic fabrics for high-efficiency oil–water separation with ultrahigh flux *Nanoscale* **14** 5840–50
- [22] Pal S, Mondal S, Pal P, Das A, Pramanik S and Maity J 2021 Fabrication of durable, fluorine-free superhydrophobic cotton fabric for efficient self-cleaning and heavy/light oil-water separation *Colloid and Interface Science Communications* **44** 100469
- [23] Foorginezhad S and Zerafat M M 2019 Fabrication of superhydrophobic coatings with self-cleaning properties on cotton fabric based on Octa vinyl polyhedral oligomeric silsesquioxane/polydimethylsiloxane (OV-POSS/PDMS) nanocomposite *J. Colloid Interface Sci.* **540** 78–87
- [24] Lee S and Park C H 2018 Electric heated cotton fabrics with durable conductivity and self-cleaning properties *RSC Adv.* **8** 31008–18
- [25] Rananavare A P and Lee J 2022 Hydrophobic cotton fabric synthesized via dispersion polymerization from poly (glycidyl methacrylate) nanoparticles for self-cleaning applications *Prog. Org. Coat.* **170** 107006
- [26] Xu Q, Ke X, Zhang Y and Wang P 2022 Preparation of durable superhydrophobic cotton fabric for self-cleaning and oil-water separation *Fibers Polym.* **23** 1572–81
- [27] Xue C H, Fan Q Q, Guo X J, An Q F and Jia S T 2019 Fabrication of superhydrophobic cotton fabrics by grafting of POSS-based polymers on fibers *Appl. Surf. Sci.* **465** 241–8
- [28] Jannatun N, Taraqqi-A-Kamal A, Rehman R, Kuker J and Lahiri S K 2020 A facile cross-linking approach to fabricate durable and self-healing superhydrophobic coatings of SiO₂-PVA@ PDMS on cotton textile *Eur. Polym. J.* **134** 109836
- [29] Simpson J T, Hunter S R and Aytug T 2015 Superhydrophobic materials and coatings: a review *Rep. Prog. Phys.* **78** 086501
- [30] Do V-T and Chun D-M 2022 Fabrication of large-scale, flexible, and robust superhydrophobic composite films using hydrophobic fumed silica nanoparticles and polydimethylsiloxane *Polymer* **244** 124630
- [31] Saadatbakhsh M, Asl S J, Kiani M J and Nouri N M 2020 Slip length measurement of pdms/hydrophobic silica superhydrophobic coating for drag reduction application *Surf. Coat. Technol.* **404** 126428
- [32] Xie J, Hu J, Lin X, Fang L, Wu F, Liao X, Luo H and Shi L 2018 Robust and anti-corrosive PDMS/SiO₂ superhydrophobic coatings fabricated on magnesium alloys with different-sized SiO₂ nanoparticles *Appl. Surf. Sci.* **457** 870–80
- [33] Tong W, Xiong D, Wang N, Wu Z and Zhou H 2019 Mechanically robust superhydrophobic coating for aeronautical composite against ice accretion and ice adhesion *Composites B* **176** 107267
- [34] Singh A K and Singh J K 2016 Fabrication of zirconia based durable superhydrophobic–superoleophilic fabrics using non fluorinated materials for oil–water separation and water purification *RSC Adv.* **6** 103632–40
- [35] Zhou C, Chen Z, Yang H, Hou K, Zeng X, Zheng Y and Cheng J 2017 Nature-inspired strategy toward superhydrophobic fabrics for versatile oil/water separation *ACS Appl. Mater. Interfaces* **9** 9184–94

- [36] Xiao Z, Wang Q, Yao D, Yu X and Zhang Y 2019 Enhancing the robustness of superhydrophobic coatings via the addition of sulfide *Langmuir* **35** 6650–6
- [37] Chang H, Tu K, Wang X and Liu J 2015 Fabrication of mechanically durable superhydrophobic wood surfaces using polydimethylsiloxane and silica nanoparticles *RSC Adv.* **5** 30647–53
- [38] Cheng Q Y, Zhao X L, Weng Y X, Li Y D and Zeng J B 2019 Fully sustainable, nanoparticle-free, fluorine-free, and robust superhydrophobic cotton fabric fabricated via an eco-friendly method for efficient oil/water separation *ACS Sustainable Chemistry & Engineering* **7** 15696–705
- [39] Pongsa U, Tasai A, Kasemsiri P, Kamwilaisak K, Saengprachatanarug K, Jetsrisuparb K and Hiziroglu S 2018 Effect of ultrasonic washing on the properties of superhydrophobic cotton fabric coated with epoxy composite film *Journal of Engineering Science and Technology* **13** 609–24
- [40] Price G J, Hearn M P, Wallace E N and Patel A M 1996 Ultrasonically assisted synthesis and degradation of poly (dimethyl siloxane) *Polymer* **37** 2303–8
- [41] Das I and De G 2015 Zirconia based superhydrophobic coatings on cotton fabrics exhibiting excellent durability for versatile use *Scientific Reports* **5** 18503
- [42] Singh A K and Singh J K 2017 Fabrication of durable superhydrophobic coatings on cotton fabrics with photocatalytic activity by fluorine-free chemical modification for dual-functional water purification *New J. Chem.* **41** 4618–28
- [43] Wang J and Chen Y 2015 Oil–water separation capability of superhydrophobic fabrics fabricated via combining polydopamine adhesion with lotus-leaf-like structure *J. Appl. Polym. Sci.* **132** 1–6